




DK18T is easily ready for work even in narrow city areas. Mounted on a Renault Master L3 DK18T reaches 18.5 mtrs.



1. Proportional control. Uncomplicated operation of all functions from the control panel in the basket.



2. The electrical rotating basket is standard.



3-4. Simple and easy operations of the outriggers.



The truck series from Denka Lift A/S - up to 18,5 mtr. working height and mounted on 3.5 t. truck

The DK18T truck series from Denka Lift A/S with all the advantages.


- up to 18,5 metres working height on 3.5 t. truck
- Narrow travelling
- Low travelling height
- Easily accessible personnel cage
- Is adapted to the Renault Master L3 and to the Opel Movano L3H1 with wheel base 4078 mm
- Battery operation - with a view at the environment

The automatic load limit device ensures optimum outreach depending on the load in the personnel cage.


Each DENKA LIFT meets the most stringent safety standards. The electrical and hydraulic units have double safety devices and the cylinders have hose break valves. All lift movements are controlled by pressure-relief valves.

Model DK18T


Technical data

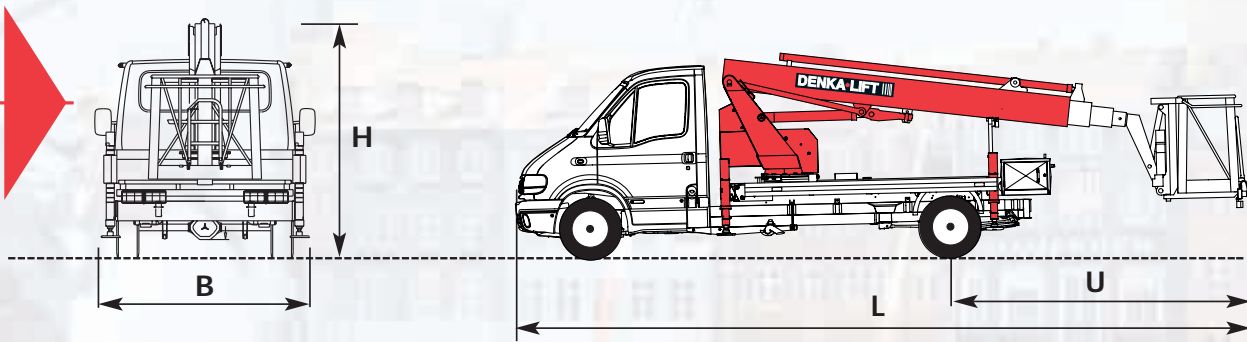

Max working height

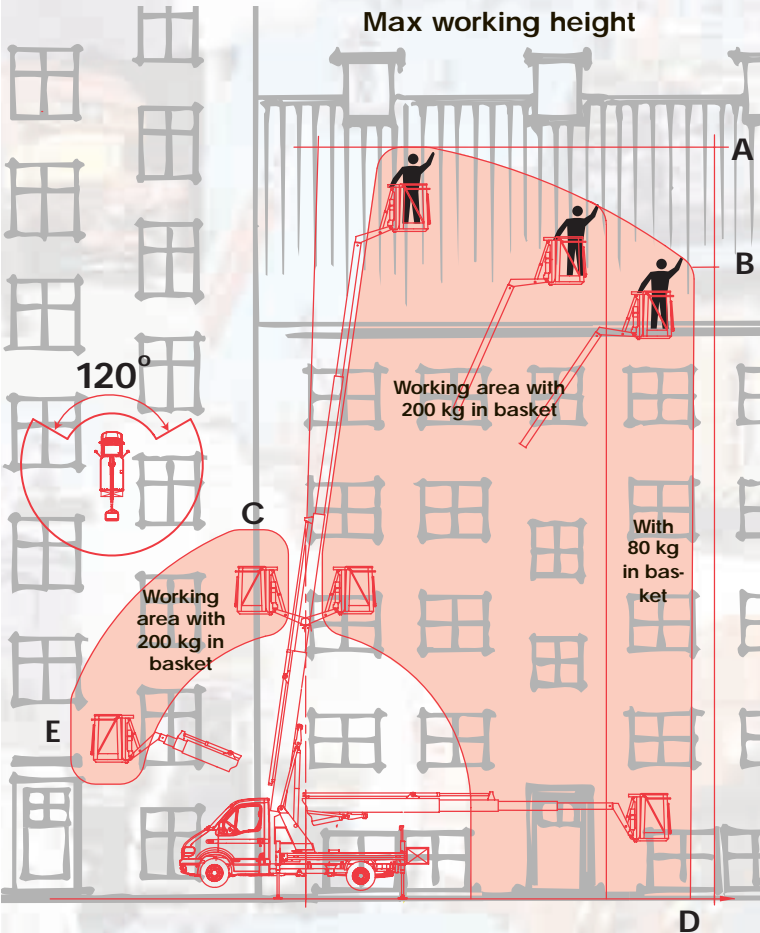

Outrigger cross section

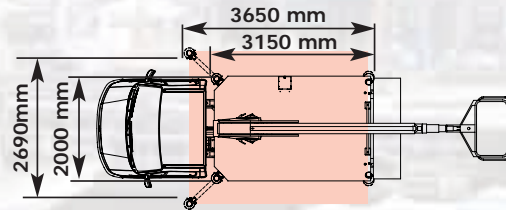

Standard model	DK18T
Capacity	
Max. working height A	18,5 m
Working height B	15,5 m
Working height C	9,0 m
Max. reach D	9,4 m
Reach E	5,8 m
Max. load in basket	200 kg
Slew movement	cont. 360°
Transport dimension	
length L1	8300 mm
Overhang U	3400 mm
Height H	2375 mm
Width B	2360 mm
Net weight standard	<3500 kg

Incl. truck Renault Master L3

STANDARD EQUIPMENT:

- Rotating alu basket 1200 mm
- Battery operation
- Proportional control
- Hydraulic outriggers
- ELCB 30 mA
- Hour counter
- Charging key

EXTRA ACCESSORIES:

- Yellow rotating light
- Height limiting system 2 steps
- Special colours
- Yellow flashing light on outriggers
- High capacity battery
- Biological degradable hydraulic oil
- Adjustable Basket from ground level