

Range T-HD

Cod. PRP1361

Description: Telescopic platform, fully hydraulic with high specifications of strength, reliability and easy maintenance. Specifically designed to fulfill the high standard of quality requested by professional users, ensuring a long working life and a high residual value.

Performances

Working height mt.		18.30
Max load in the basket kg.	† † †	250
Max working outreach mt.	† † †	13.80
Turret rotation °		Continuous
Hose track		External
Controls in the basket		Hydraulic with single levers

Platform specifications

Steel basket dimensions mt.	1.40x0.70
Fiberglass basket dimensions mt.	1.20x0.70
Basket rotation °	45 + 45
Front outriggers	Inclined
Back outriggers	Inclined
Foot plate gauge min. mt.	2.86



Assembling



This assembly represents the "multipurpose" version with outriggers slightly outside the vehicle mirrors width. The excellent capacity of levelling allows however high performances and operational possibilities.

Body Purposely designed assembly to optimize functionality and utilization

Standards CE certificate

Accessories There are available a wide range of accessories, many of them are already included as stand machine. It is recommended to contact our sales network for more information.

Other types of assembling and different vehicles We are in position to propose the same machine with different type of assembly and / or on different types of vehicles. Contact our sales organization to obtain information about all the possible solutions that we are able to offer.

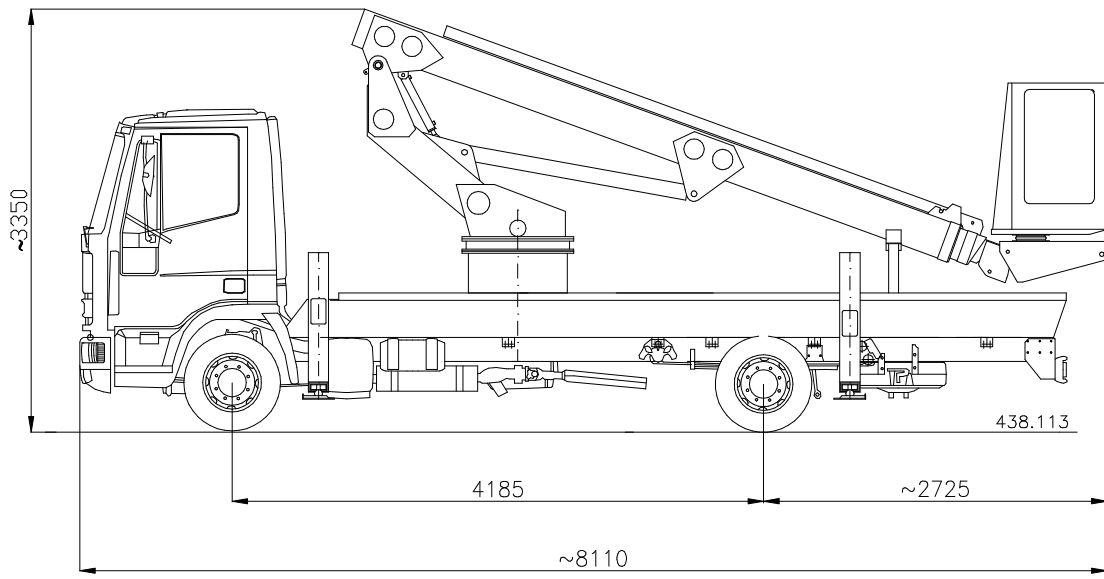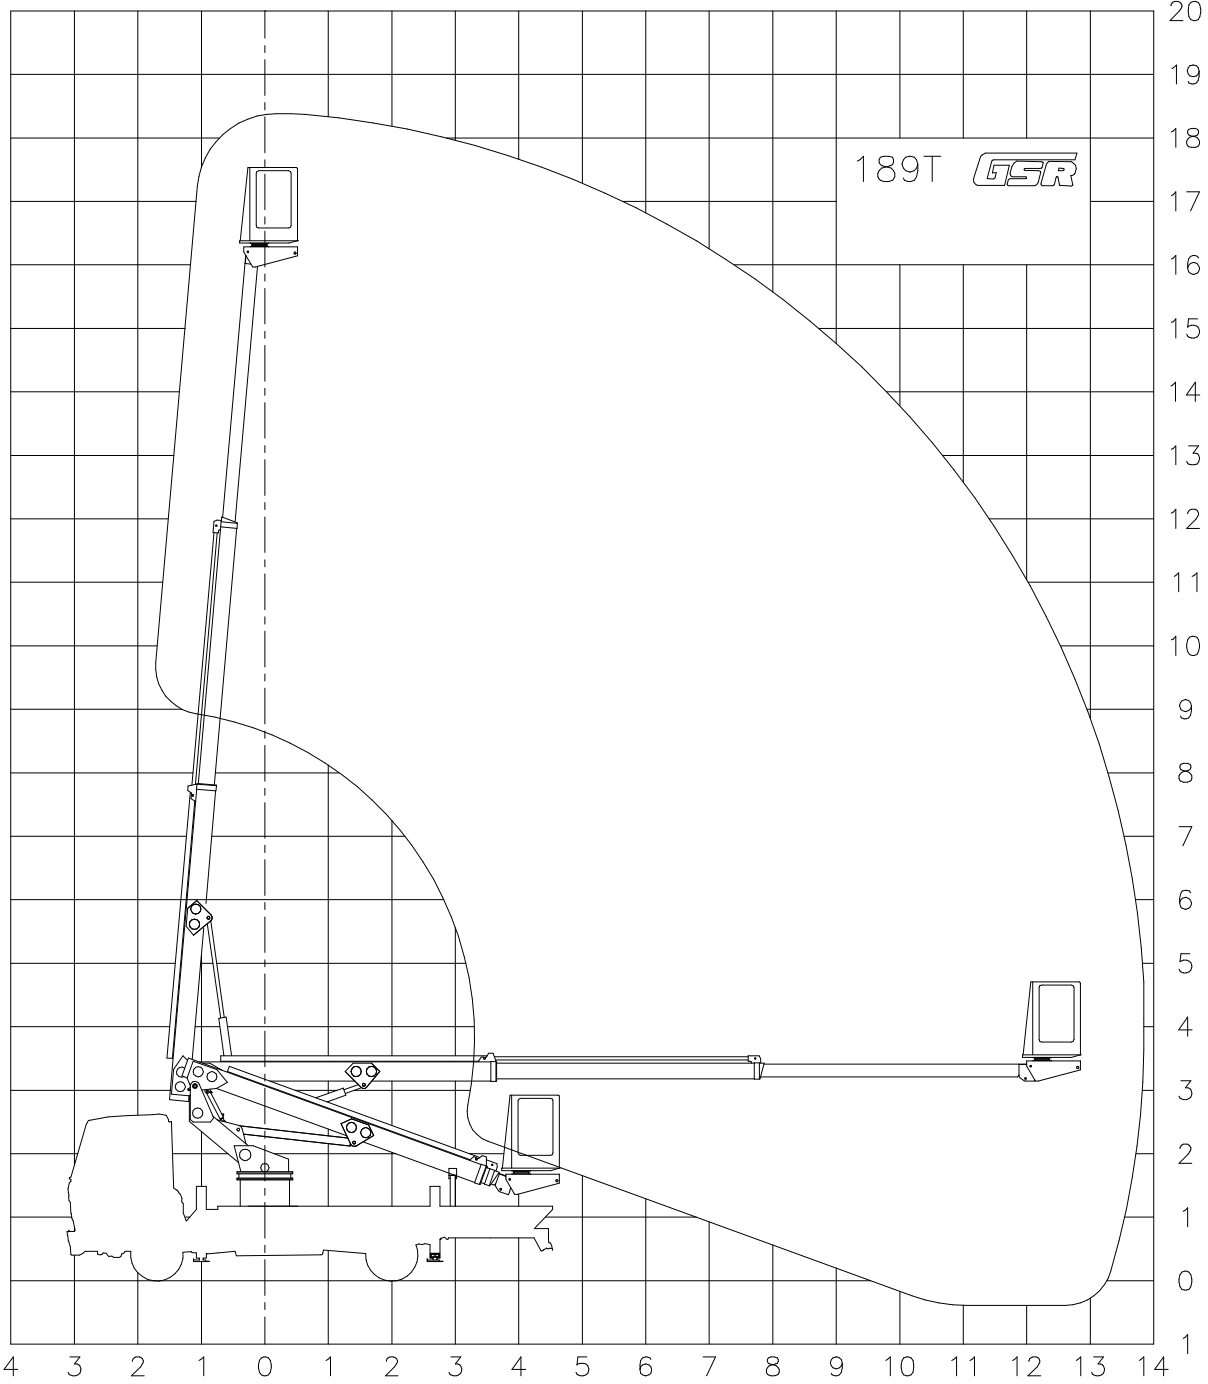

APPROXIMATE DATA - TECHNISCHE ANDERUNGEN VORBEHALTEN
 DONNEES INDICATIVES - DATI INDICATIVI

AGGIORNAMENTI MODIFICHE

C	H
B	G
A	F

MAX SAFE WORKING LOAD
MAX NENNTRAGFAHIGKEIT IM KORB
MAX CHARGE NOMINALE DANS LE PANIER
MAX PORTATA NOMINALE IN NAVICELLA

250 KG



DENOMINAZIONE
 189T Basic
 IVECO 75E15-75E17 - 7.5T

DATA 20-03-2003
 CODICE PRP1361