


Genie AWP Super Series Specifications

Aerial Work Platform - Rough Terrain & Narrow Bases

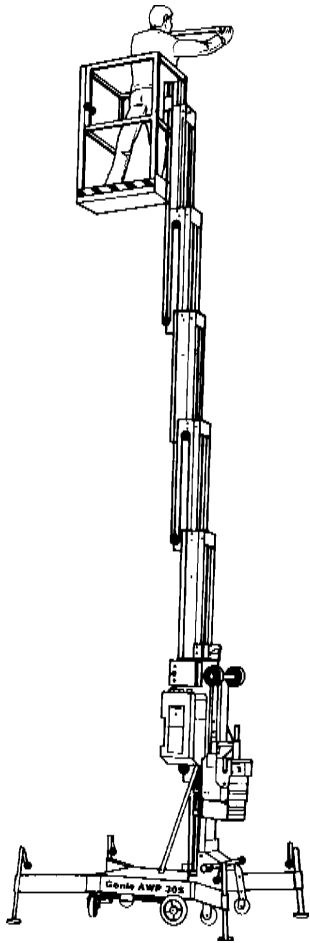

SPECIFICATIONS

MODEL	AWP-20S	
	US	Metric
ROUGH TERRAIN BASE		
Machine weight	750 lb/	340 kg/
(DC/AC models)	660 lb	299 kg
Height, stowed	79 in	2 m
Length/width	58/30 in	1.47 m/76 cm

NARROW BASE⁴

Machine weight	745 lb/	338 kg/
(DC/AC models)	655 lb	297 kg
Height, stowed	78 in	1.98 m
Length/width	50/22 in	1.27 m/56 cm

ROUGH TERRAIN AND NARROW BASES

Outrigger footprint	64/48 in	1.63/1.22 m
(l/w) ANSI		
Outrigger footprint	75/66 in	1.9/1.68 m
(l/w) CSA ¹		
Outrigger footprint	71/58 in	1.8/1.47 m
(l/w) CE indoor ²		
Outrigger footprint	112/112 in	2.84/2.84 m
(l/w) CE outdoor ²		
Corner access ³ ANSI	14 in	36 cm
Corner access ³ CSA ¹	25 in	64 cm
Corner access ³	21 in	53 cm
CE indoor ²		
Corner access ³	54 in	1.37 m
CE outdoor ²		
Wall access front/side	9/12 in	23/30 cm
ANSI		
Wall access front/side	14/20 in	36/51 cm
CSA ¹		
Wall access front/side	12/17 in	30/43 cm
CE indoor ²		
Wall access front/side	32/44 in	81 cm/1.12 m
CE outdoor ²		

PLATFORM DIMENSIONS (l x w x h)

Standard Platform	27 x 26 x 44 ³ / ₄ in	69 cm x 66 cm x 1.14 m
Gated Standard Platform	27 x 26 x 44 ³ / ₄ in	69 cm x 66 cm x 1.14 m
Standard Fiberglass Platform	29 x 26 ¹ / ₂ x 43 ¹ / ₂ in	74 cm x 67 cm x 1.1 m
Narrow Fiberglass Platform	26 x 22 x 43 ¹ / ₂ in	66 cm x 56 cm x 1.1 m
Gated Narrow Platform	26 x 20 x 44 ³ / ₄ in	66 cm x 51 cm x 1.14 m
Gated Ultra-Narrow Platform	22 x 18 x 44 ³ / ₄ in	56 cm x 46 cm x 1.14 m


¹Canadian Standards Association ²European Community ³Corner of platform top rail to corner of wall with ability to rotate leveling jack handle. ⁴On Narrow Base models only Gated Narrow, Gated Ultra-Narrow and Narrow Fiberglass platforms are available.

STANDARD FEATURES

- Wide forklift pockets
- Outrigger storage pockets
- Rocker base system
- Overhead crane attachment point
- Auxiliary platform lowering feature
- AC wiring to platform
- AC or DC power options
- Small outrigger footprints

Genie® AWP Super Series Specifications

Aerial Work Platform - Rough Terrain & Narrow Bases

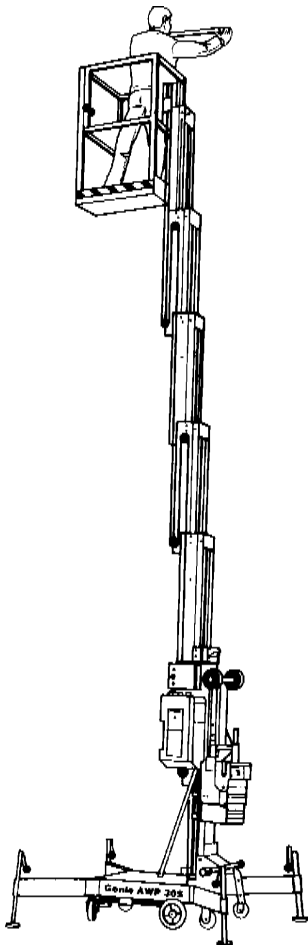

STANDARD FEATURES

- Wide forklift pockets
- Outrigger storage pockets
- Rocker base system
- Overhead crane attachment point
- Auxiliary platform lowering feature
- AC wiring to platform
- AC or DC power options. Airmotor power option on AWP-30S
- Small outrigger footprints

SPECIFICATIONS

MODEL	AWP-25S		AWP-30S	
	US	Metric	US	Metric
ROUGH TERRAIN BASE				
Machine weight	784 lb/	356 kg/	819 lb/	371 kg/
(DC/AC models)	694 lb	315 kg	729 lb	331 kg
Height, stowed	79 in	2 m	79 in	2 m
Length/width	58/30 in	1.47 m/76 cm	58/30 in	1.47 m/76 cm
NARROW BASE⁴				
Machine weight	780 lb/	354 kg/	814 lb/	369 kg/
(DC/AC models)	690 lb	313 kg	724 lb	328 kg
Height, stowed	78 in	1.98 m	78 in	1.98 m
Length/width	52/22 in	1.32 m/56 cm	55/22 in	1.4 m/56 cm
ROUGH TERRAIN AND NARROW BASES				
Outrigger footprint	64/48 in	1.63/1.22 m	72/58 in	1.83/1.47 m
(l/w) ANSI				
Outrigger footprint	83/74 in	2.1/1.88 m	95/90 in	2.4/2.3 m
(l/w) CSA ¹				
Outrigger footprint	71/58 in	1.8/1.47 m	83/74 in	2.1/1.88 m
(l/w) CE indoor ²				
Outrigger footprint	112/112 in	2.84/2.84 m	130/136 in	3.3/3.45 m
(l/w) CE outdoor ²				
Corner access ³ ANSI	13 in	33 cm	19 in	48 cm
Corner access ³ CSA ¹	29 in	74 cm	38 in	97 cm
Corner access ³	20 in	51 cm	27 1/2 in	70 cm
CE indoor ²				
Corner access ³	52 in	1.32 m	61 in	1.55 m
CE outdoor ²				
Wall access front/side	6/12 in	15/30 cm	7/17 in	18/43 cm
ANSI				
Wall access front/side	15/25 in	38/64 cm	19/33 in	48/84 cm
CSA ¹				
Wall access front/side	10/17 in	25/43 cm	9/20 in	23/51 cm
CE indoor ²				
Wall access front/side	29/44 in	74 cm/1.12 m	35/55 in	89 cm/1.4 m
CE outdoor ²				
PLATFORM DIMENSIONS (l x w x h)				
Standard Platform		27 x 26 x 44 3/4 in		69 cm x 66 cm x 1.14 m
Gated Standard Platform		27 x 26 x 44 3/4 in		69 cm x 66 cm x 1.14 m
Standard Fiberglass Platform		29 x 26 1/2 x 43 1/2 in		74 cm x 67 cm x 1.1 m
Narrow Fiberglass Platform		26 x 22 x 43 1/2 in		66 cm x 56 cm x 1.1 m
Gated Narrow Platform		26 x 20 x 44 3/4 in		66 cm x 51 cm x 1.14 m
Gated Ultra-Narrow Platform		22 x 18 x 44 3/4 in		56 cm x 46 cm x 1.14 m

¹Canadian Standards Association ²European Community ³Corner of platform top rail to corner of wall with ability to rotate leveling jack handle. ⁴On Narrow Base models only Gated Narrow, Gated Ultra-Narrow and Narrow Fiberglass Platforms are available.