



## Easily Configured to Meet Your Needs:

### PLATFORM OPTIONS

- Standard platform
- Sliding mid-rail extension deck
- Gated extension deck
- Stock Picker platform
- Stock Picker platform with adjustable tray
- Stock Picker platform with rear parcel tray
- Standard AWP platform
- Narrow AWP platform
- Standard fiberglass platform
- Narrow fiberglass platform

### POWER OPTION

- 24 V (4- 6 V 225 Ah batteries)

### TIRE OPTION

- Non-marking tire

## Standard Features

### MEASUREMENTS:

- GR™-15 has 20 ft 8 in (6.47 m) working height
- GR™-15 has 14 ft 8 in (4.47 m) platform height
- Up to 500 lb (227 kg) lift capacity

### POWER:

- Automatic 25 amp battery charger

### PRODUCTIVITY:

- Patented rigid mast system
- Compact base 29.5 x 53 in (75 cm x 1.35 m)
- Standard sliding-midrail platform- 29.5 x 35 in (75 x 88 cm)
- Low 15 in (38 cm) platform entry height
- Adjustable work station tray
- Fully proportional lift and drive controls
- On-board diagnostic system
- AC power to platform
- Descent and tilt alarm
- Auxiliary platform lowering
- Zero inside turning radius
- Dual wheel brakes
- Hydraulic brake release
- Pothole protection
- Hinged rear covers for easy access to all major electrical and hydraulic components
- Large forklift pockets 2.5 x 5.125 in (6.4 x 13 cm)
- Tie down attachment points
- Non-marking tires

## Options and Accessories

### PRODUCTIVITY

- Sliding mid-rail extension deck
- Gated extension deck
- Stock Picker platform with adjustable tray
- Stock Picker rear parcel tray
- Stock Picker bike rack
- Standard AWP platform
- Narrow AWP platform
- Standard fiberglass platform
- Narrow fiberglass platform
- Fluorescent tube caddy
- Motion alarm and flashing beacons
- Automotive horn


### POWER:

- 800 watt inverter (120-230 V AC 50-60 Hz)
- Maintenance-free batteries

Specifications

**Standards Compliance**

- ANSI A92.6
- CSA B354.2
- CE Compliance
- AS 1418.10

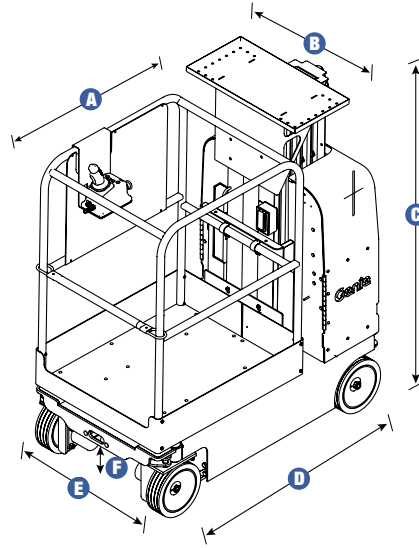

**GR™-15**

	US	Metric
--	----	--------

**MEASUREMENTS:**

Working height*	20 ft 8 in	6.47 m
Platform height	14 ft 8 in	4.47 m

<b>A B</b> Platform dimensions (l x w)		
Standard platform	35 x 29.5 in	88 x 75 cm
Standard platform with extension	55 x 29.5 in	1.4 m x 75 cm
Stock Picker platform	35 x 28.75 in	88 x 73 cm
Stock Picker platform with adjustable tray	56 x 28.75 in	1.4 m x 73 cm
Standard AWP platform	27 x 26 in	69 x 51 cm
Narrow AWP platform	26 x 20 in	66 x 51 cm
Standard fiberglass platform	29 x 26.5 in	74 x 67 cm
Narrow fiberglass platform	26 x 22 in	66 x 56 cm
<b>C</b> Height- stowed	5 ft 2 in	1.57 m
<b>D</b> Length -stowed	4 ft 5 in	1.35 m
<b>E</b> Width	2 ft 5.5 in	75 cm
<b>F</b> Ground clearance	2.5 in	6.35 cm
Lift capacity	500 lbs	227 kg

**PRODUCTIVITY:**

Drive speed - stowed	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h
Gradeability**	30%	
Turning radius- inside	zero	
Controls	12 V DC proportional	
Tires	non-marking	

**POWER:**

Power source	4- 6 V 225 Ah batteries	
Hydraulic system capacity	2.2 gal	8.33 L
Weight***	2,192 lbs	994 kg

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Gradeability applies to driving on slopes, see operators manual for details regarding slope rating.

\*\*\* Weight will vary depending on options and/or country standards.