


# Genie GS™-1530/GS-1930 Specifications

## Self-Propelled Scissor Lift

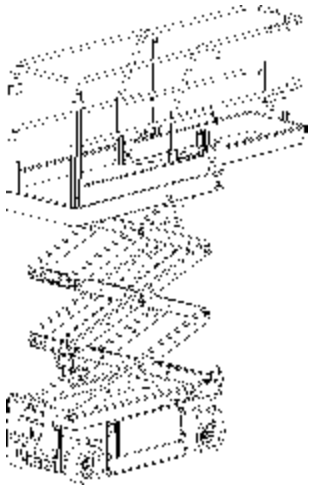

### SPECIFICATIONS

MODEL	GS-1530		GS-1930	
	US	Metric	US	Metric
Working height	21 ft	6.5 m	25 ft 1 in	7.8 m
Platform height	15 ft	4.6 m	19 ft 1 in	5.8 m
Height - stowed (guardrails)				
ANSI, CSA	76 in	1.93 m	78 in	2 m
CE	80 in	2.04 m	82 1/2 in	2.1 m
Height - stowed (platform)	36 1/2 in	93 cm	38 1/2 in	98 cm
Length - stowed	72 in	1.83 m	72 in	1.83 m
Width	30 in	76 cm	30 in	76 cm
Wheelbase	52 in	1.32 m	52 in	1.32 m
Ground clearance	2 5/8 in	7 cm	2 5/8 in	7 cm
Pothole guards deployed	7/8 in	2 cm	7/8 in	2 cm
Platform length - outside	64 3/8 in	1.64 m	64 3/8 in	1.64 m
Platform width - outside	29 1/4 in	74 cm	29 1/4 in	74 cm
Platform length - extended	103 3/8 in	2.63 m	103 3/8 in	2.63 m
Guardrail height - ANSI, CSA	39 in	1 m	39 in	1 m
- CE	43 3/8 in	1.1 m	43 3/8 in	1.1 m
Toeboard height	6 in	15 cm	6 in	15 cm
Lift capacity	600 lb	272 kg	500 lb	227 kg
Extension deck lift capacity	250 lb	113 kg	250 lb	113 kg
Turning radius - outside	61 in	1.55 m	61 in	1.55 m
Turning radius - inside	zero		zero	
Power source	24V (4 6V 245AH batteries) (both models)			
Drive speed - stowed	0-2.5 mph	0-4 km/h	0-2.5 mph	0-4 km/h
Drive speed - raised	0-0.6 mph	0-1 km/h	0-0.6 mph	0-1 km/h
Raise/lower speed	16/17 sec		16/23 sec	
Controls	proportional		proportional	
Tires (solid rubber, non-marking)	12 x 4.5 x 8 in (30 x 11 x 20 cm) both models			
Gradeability	30%		30%	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Pothole protection	standard		standard	
Weight - ANSI	2,658 lb	1,206 kg	2,956 lb	1,341 kg
- CSA, CE	2,658 lb	1,206 kg	2,880 lb	1,306 kg

### STANDARD FEATURES

- Solid steel deck platform with slip-resistant surface
- Low noise level
- Proportional controls
- High angle steering for excellent maneuverability
- Multiple disc brakes provide smooth deceleration
- Pothole guards reduce tip-over hazards
- Maintenance-free pivot-point bearings
- Removable joystick control box allows activation of all lift and drive functions from the ground