


# Genie GS™-1530/GS-1930 Specifications

## Self-Propelled Scissor Lift

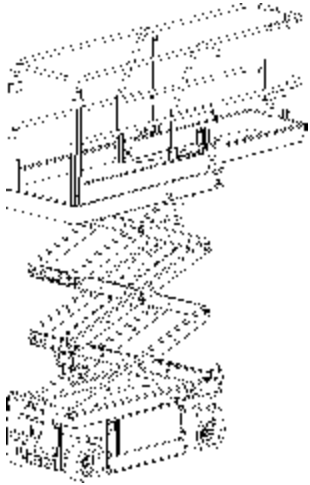

### SPECIFICATIONS

| MODEL                             | GS-1530                                       |          | GS-1930          |          |
|-----------------------------------|---|----------|------------------|----------|
|                                   | US  | Metric   | US               | Metric   |
| Working height                    | 21 ft   | 6.5 m    | 25 ft 1 in       | 7.8 m    |
| Platform height                   | 15 ft   | 4.6 m    | 19 ft 1 in       | 5.8 m    |
| Height - stowed (guardrails)      |   |          |                  |          |
| ANSI, CSA                         | 76 in   | 1.93 m   | 78 in            | 2 m      |
| CE                                | 80 in   | 2.04 m   | 82 1/2 in        | 2.1 m    |
| Height - stowed (platform)        | 36 1/2 in                                     | 93 cm    | 38 1/2 in        | 98 cm    |
| Length - stowed                   | 72 in   | 1.83 m   | 72 in            | 1.83 m   |
| Width                             | 30 in   | 76 cm    | 30 in            | 76 cm    |
| Wheelbase                         | 52 in   | 1.32 m   | 52 in            | 1.32 m   |
| Ground clearance                  | 2 5/8 in                                      | 7 cm     | 2 5/8 in         | 7 cm     |
| Pothole guards deployed           | 7/8 in  | 2 cm     | 7/8 in           | 2 cm     |
| Platform length - outside         | 64 3/8 in                                     | 1.64 m   | 64 3/8 in        | 1.64 m   |
| Platform width - outside          | 29 1/4 in                                     | 74 cm    | 29 1/4 in        | 74 cm    |
| Platform length - extended        | 103 3/8 in                                    | 2.63 m   | 103 3/8 in       | 2.63 m   |
| Guardrail height - ANSI, CSA      | 39 in   | 1 m      | 39 in            | 1 m      |
| - CE                              | 43 3/8 in                                     | 1.1 m    | 43 3/8 in        | 1.1 m    |
| Toeboard height                   | 6 in  | 15 cm    | 6 in             | 15 cm    |
| Lift capacity                     | 600 lb  | 272 kg   | 500 lb           | 227 kg   |
| Extension deck lift capacity      | 250 lb  | 113 kg   | 250 lb           | 113 kg   |
| Turning radius - outside          | 61 in   | 1.55 m   | 61 in            | 1.55 m   |
| Turning radius - inside           | zero  |          | zero             |          |
| Power source                      | 24V (4 6V 245AH batteries) (both models)      |          |                  |          |
| Drive speed - stowed              | 0-2.5 mph                                     | 0-4 km/h | 0-2.5 mph        | 0-4 km/h |
| Drive speed - raised              | 0-0.6 mph                                     | 0-1 km/h | 0-0.6 mph        | 0-1 km/h |
| Raise/lower speed                 | 16/17 sec                                     |          | 16/23 sec        |          |
| Controls                          | proportional                                  |          | proportional     |          |
| Tires (solid rubber, non-marking) | 12 x 4.5 x 8 in (30 x 11 x 20 cm) both models |          |                  |          |
| Gradeability                      | 30%   |          | 30%              |          |
| Drive                             | dual front wheel                              |          | dual front wheel |          |
| Multiple disc brakes              | dual rear wheel                               |          | dual rear wheel  |          |
| Pothole protection                | standard                                      |          | standard         |          |
| Weight - ANSI                     | 2,658 lb                                      | 1,206 kg | 2,956 lb         | 1,341 kg |
| - CSA, CE                         | 2,658 lb                                      | 1,206 kg | 2,880 lb         | 1,306 kg |

### STANDARD FEATURES

- Solid steel deck platform with slip-resistant surface
- Low noise level
- Proportional controls
- High angle steering for excellent maneuverability
- Multiple disc brakes provide smooth deceleration
- Pothole guards reduce tip-over hazards
- Maintenance-free pivot-point bearings
- Removable joystick control box allows activation of all lift and drive functions from the ground