


Genie Z-60/34 Specifications

Articulated Booms

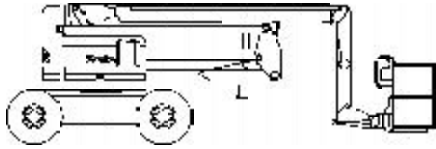

STANDARD FEATURES

- Anti-restart engine protection
- Fuel select switch on platform and ground controls (Gas/LPG models)
- 360° continuous turntable rotation
- 180° hydraulic-powered platform rotation
- Dual fuel (Gas/LPG) or diesel power options
- Self-leveling platform
- Fully proportional controls
- AC wiring to platform
- Tilt alarm
- Drive enable system
- Horn
- Positive traction drive
- Engine monitoring gauges
- Hour meter
- Locking turntable covers

SPECIFICATIONS

MODEL

	Industrial 4x2 ¹		Construction 4x2/4x4 ²	
	US	Metric	US	Metric
Working height	66 ft	20.3 m	66 ft	20.3 m
Platform height	60 ft	18.3 m	60 ft	18.3 m
Height - stowed	8 ft 1 in	2.46 m	8 ft 4 in	2.54 m
Length - stowed	26 ft	7.9 m	26 ft	7.9 m
Width	7 ft	2.13 m	7 ft 6 in	2.29 m
Wheelbase	7 ft 11 in	2.41 m	7 ft 9 in	2.36 m
Ground clearance	9 in	23 cm	12 in	30 cm
Platform length: 6 ft	30 in	76 cm	30 in	76 cm
8 ft	36 in	91 cm	36 in	91 cm
Platform width: 6 ft	72 in	1.83 m	72 in	1.83 m
8 ft	96 in	2.44 m	96 in	2.44 m
Horizontal reach max	34 ft	10.4 m	34 ft	10.4 m
Up and over clearance	28 ft	8.5 m	28 ft	8.5 m
Lift capacity	500 lb	227 kg	500 lb	227 kg
Turning radius - outside	13 ft 5 in	4.1 m	19 ft 5 in	5.9 m
Turning radius - inside	4 ft	1.22 m	11 ft	3.35 m
Turntable rotation	360° continuous		360° continuous	
Tailswing	zero		zero	
Power source	Ford LRG 425 EFI Gas/LPG 82 hp (61 kw) Deutz Diesel F4L 1011 56 hp (42 kw)			
Drive speed - stowed	3.5 mph	5.6 km/h	4.5 mph	7.2 km/h
Drive speed - raised ³	0.6 mph	1 km/h	0.6 mph	1 km/h
Controls	12V DC proportional		12V DC proportional	
Platform rotation	180°		180°	
Auxiliary power unit	12V DC		12V DC	
Tires	32x12-15, 20 ply		15x19.5, 12 ply	
Gradeability ⁴	30%	30%	20%/35%	20%/35%
Hydraulic tank capacity	45 gal	170 litre	45 gal	170 litre
Fuel tank capacity	20 gal	76 litre	20 gal	76 litre
Weight	21,890 lb	9,929 kg	22,055 lb	10,004 kg

¹With industrial tires.

²With rough terrain tires.

³In lift mode (platform raised), the machine is designed for operation on firm level surfaces only.

⁴Stowed position only.