

# nifty

# 90

## TRAILER MOUNTED ACCESS PLATFORM



**9.50m (31ft 2in)**

Working height

**3.50m (11ft)**

Working outreach

### Fully Proportional Hydraulic Controls

Simple, reliable &  
easy to maintain

### Compact Outriggers

For setup in confined areas

### Weight Saving Chassis Design

Easily towed on the road  
& manoeuvred on site

### Telescopic Axle

Access through single  
doorway openings



# nifty



# nifty 90



The Nifty 90 is the ideal alternative to ladders and scaffolds. Its compact design allows it to set up in the most confined spaces. The telescopic axle allows it to pass through single doorways and its simple, reliable hydraulic controls make even first time operation straightforward.

## SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Hand Brake (Option)
- Harness Point
- CE Marked



The Nifty 90 has a telescopic axle allowing it to pass through a 0.75m (2ft 6in) opening and a harness point in the platform for operator safety when working.

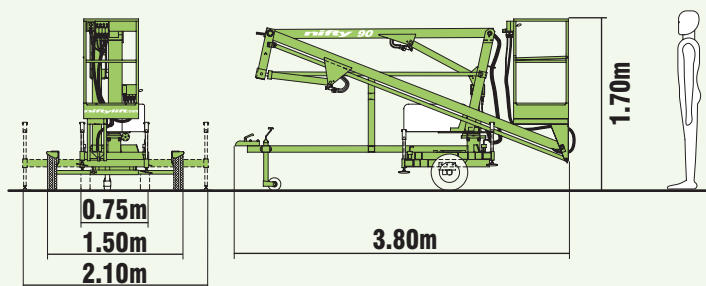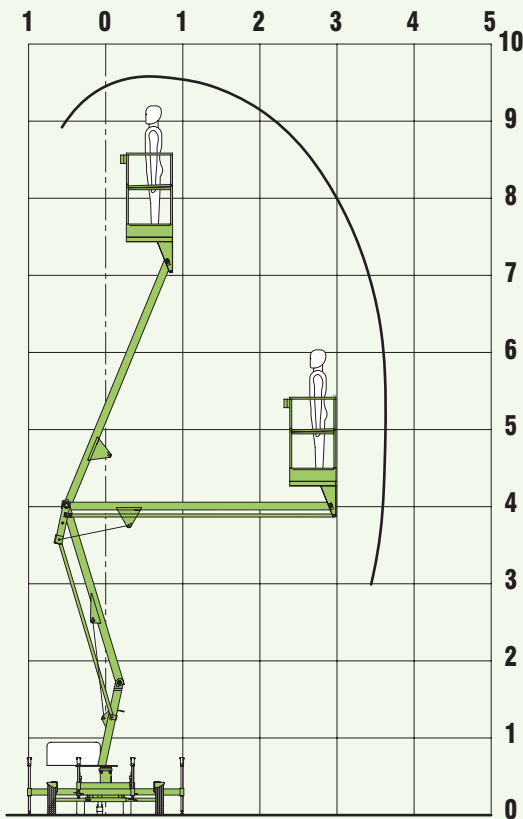

The Nifty 90's working outreach facility makes it ideal for working over racking or machinery.

## SPECIFICATIONS

<b>Working Height</b>	9.50m	31ft 2in
<b>Platform Height</b>	7.50m	24ft 7in
<b>Working Outreach</b>	3.50m	11ft 6in
<b>Slew</b>	360°	
<b>Width - Travelling</b>	1.50m	4ft 11in
<b>- Working</b>	2.10m	6ft 11in
<b>- Axles Retracted</b>	0.75m	2ft 6in
<b>Height - Overall</b>	1.70m	5ft 7in
<b>Length - Overall</b>	3.80m	12ft 5in
<b>Weight</b>	595kg*	1,309lbs*
<b>Platform Capacity</b>	120kg	265lbs
<b>Platform Size</b>	0.60m x 0.60m	2ft x 2ft
<b>Control System</b>	Fully Proportional Hydraulic	
<b>Power System</b>	Mains Only Battery Only	

\* Weights may vary according to specification / power options, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.