

# HR15N

## SELF PROPELLED ACCESS PLATFORM



**15.60m (51ft)**  
Working height

**9.60m (31ft 6in)**  
Working Outreach

**1.50m Narrow Chassis**  
Allows operation in  
confined areas

**Bi-Energy Power  
Available**  
Optimising utilisation

**225kg SWL**  
Extra capacity for tools  
and materials

**Telescopic Upper Boom**  
Greater accuracy when  
positioning platform

**Platform Rotation  
& Flyboom**  
Improving manoeuvrability  
on site



**nifty**






# nifty

## Heightrider 15N

The Nifty Height Rider 15N offers one of the best working envelopes in its class. Designed using the latest computer technology, it delivers unrivalled working outreach combined with pinpoint accuracy when positing the platform. A super narrow base as standard with the option of Bi-Energy power makes it ideal for a wide range of applications.

### SAFETY FEATURES

- Manual Recovery with Hand Pump
- Automatic Failsafe Brakes
- CE Mark
- Tilt Alarm
- Solid Tyres
- Dual Harness Points
- Dual Controls (platform & base)
- Lock Valves on all Hydraulic Cylinders

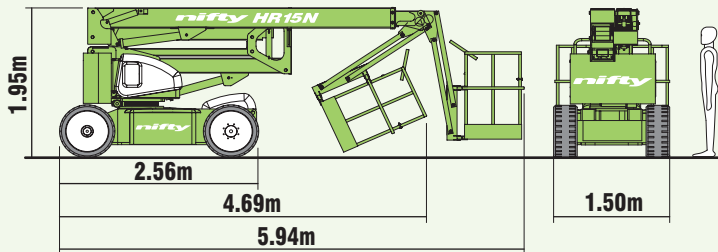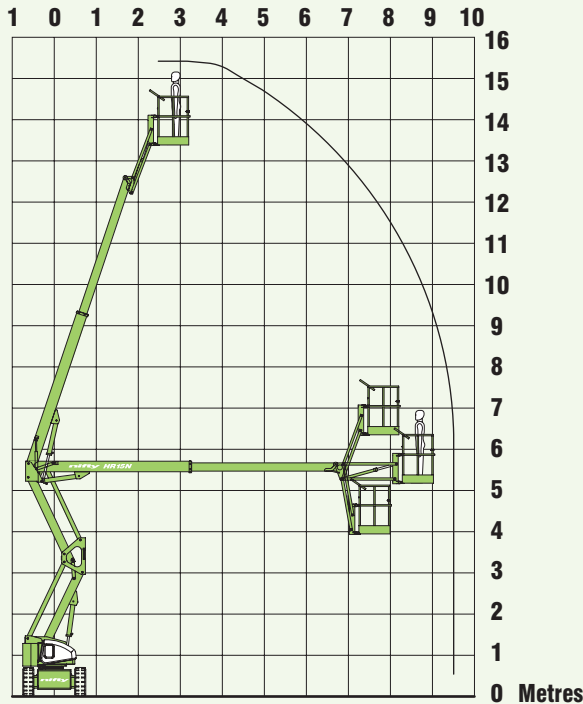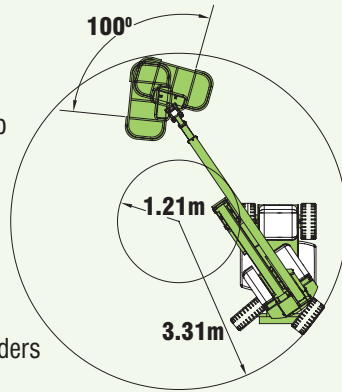

With more outreach than any other machine in its class and a base width of only 1.50m, the HR15N is one of the most effective and versatile self-propelled platforms available.

### SPECIFICATIONS

<b>Height - Working</b>	15.60m	51ft
<b>Height - Platform</b>	13.60m	44ft 7in
<b>Outreach - Working</b>	9.60m	31ft 6in
<b>Slew</b>	360°	
<b>Flyboom Arc</b>	150°	
<b>Width</b>	1.50m	4ft 11in
<b>Height - Stowed</b>	1.95m	6ft 6in
<b>Length - Stowed</b>	4.69m	15ft 5in
<b>- Overall</b>	5.94m	19ft 6in
<b>Weight</b>	6,400kg	14,097lbs
<b>Turning Radius - Inside</b>	1.21m	3ft 11in
<b>- Outside</b>	3.31m	10ft 10in
<b>Platform Rotation</b>	100°	
<b>Platform Capacity</b>	225kg	500lbs
<b>Platform Size</b>	1.50m x 0.70m	4ft 11in x 2ft 4in
<b>Drive Speed</b>	4kmph	2.5mph
<b>Gradeability</b>	25%	
<b>Control System</b>	Fully proportional electric over hydraulic	
<b>Power System</b>	Battery Only Bi-Energy, with Kubota 722 3 cylinder Diesel 32Hp	

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.