

nifty

SD64

SELF DRIVE WORK PLATFORM



69ft 7in (21.20m)

Working height

43ft 4in (13.20m)

Working outreach

4 Wheel Drive Available

Maximum traction
over rough terrain

4 Wheel Steer Available

Superior maneuverability on site

**Independent Suspension
Available**

For fast comfortable
movement on site

**Platform Rotation
& Flyboom**

Improved access to applications

Turf Tires Available

For minimal disruption to
sensitive grass surfaces




nifty

nifty SD64

The Nifty SD64 is the ultimate combination of our trailer mounted and self propelled product ranges. With the option of full independent suspension and 4 wheel drive, the SD64 can cope with a wide range of working environments and still offers the same impressive reach as the TM64. Low weight design makes it economical and quick to transport and the 4 wheel steer option gives the operator enormous flexibility to maneuver once on site. Excellent gradeability coupled with a good travel speed allow the SD64 to be positioned and set up quickly, allowing the operator to spend more of their time working.

SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible & Visual Alarms
- Lock Valves on all Hydraulic Cylinders
- Dual Controls (Platform & Base)
- Manual Recovery with Hand-Pump
- Meets OSHA and ANSI Regulations

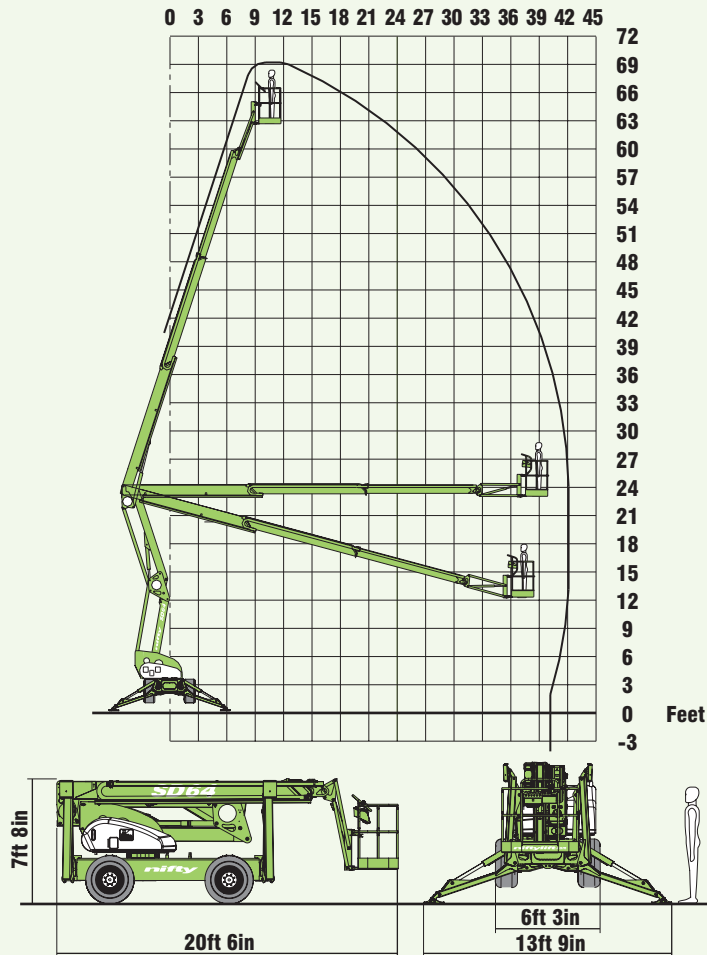

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



The extra maneuverability available from the 4 wheel steer option coupled with the special "Turf Tires" make the SD64 ideal for working on sensitive surfaces such as grass.

SPECIFICATIONS

Height - Working	69ft 7in	21.20m
Height - Platform	63ft	19.20m
Outreach - Working	43ft 4in	13.20m
Slew	360°	
Flyboom Arc	150°	
Width - Traveling	6ft 3in	1.90m
- Working	13ft 9in	4.20m
Height - Stowed	7ft 8in	2.35m
Length - Overall	20ft 6in	6.25m
Weight	8,250lbs - 9,350lbs*	3,750kg - 4,250kg*
Turning Radius - Inside	7ft 5in	1.50m
- Outside	17ft	3.50m
Platform Rotation	100°	
Platform Capacity	500lbs	225kg
Platform Size	3ft 8in x 2ft 1in	1.34m x 0.67m
Drive Speed	6.3mph	10kph
Gradeability	35%	
Control System	Fully proportional hydraulic	
Power System	Kubota 722 18Hp - 2WD Kubota 1505 32Hp - 4WD	

* Weights may vary according to specification / power options, please confirm before ordering.