

nifty



nifty

TM24 TRAILER MOUNTED WORK PLATFORM



31ft 2in (9.50m)

Working height

11ft (3.50m)

Working outreach

**Fully Proportional
Hydraulic Controls**

Simple, reliable &
easy to maintain

Compact Outriggers

For setup in confined areas

**Weight Saving
Chassis Design**

Easily towed on the road
& manoeuvred on site

Telescopic Axle

Access through single
doorway openings



nifty™ TM24



The Nifty TM24 is the ideal alternative to ladders and scaffolds. Its compact design allows it to be set up in the most confined spaces. The telescopic axle allows it to pass through single doorways and its simple, reliable hydraulic controls make even first time operation straightforward.

SAFETY FEATURES

- Pressure Sensitive Outriggers with
- Audible Alarm
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Hand Brake (Option)
- Harness Point
- Meets OSHA and ANSI regulations



The TM24 has a telescopic axle allowing it to pass through a 2ft 6in (0.75m) opening and a harness point in the platform for operator safety when working.

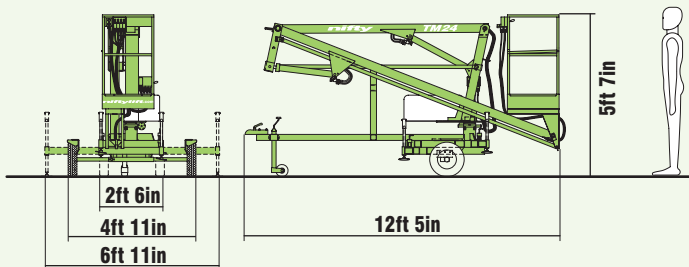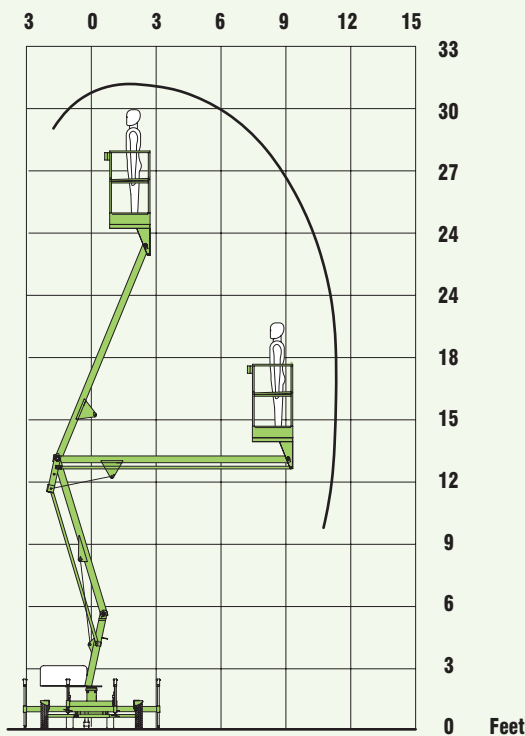

The TM24's working outreach makes it ideal for working over racking or machinery.

SPECIFICATIONS

Working Height	31ft 2in	9.50m
Platform Height	24ft 7in	7.50m
Working Outreach	11ft 6in	3.50m
Slew	360°	
Width - Traveling	4ft 11in	1.50m
- Working	6ft 11in	2.10m
- Axles Retracted	2ft 6in	0.75m
Height - Overall	5ft 7in	1.70m
Length - Overall	12ft 5in	3.80m
Weight	1,309lbs*	595kg*
Platform Capacity	265lbs	120kg
Platform Size	24in x 24in	0.60m x 0.60m
Control System	Fully Proportional Hydraulic	
Power System	Mains Only Battery Only	

* Weights may vary according to specification / power options, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.