



# Omme lift

**Top safety with  
this handy  
electro-hydraulically  
operated lift**

**Type 1250 E  
Trailer-mounted**

**CE**

**SAFE ACCESS - made of steel**


Technical data:	1250 EZ Trailer-mounted	1250 EBZ Trailer-mounted
Max. working height	12.5 m	12.5 m
Max. outreach	8.5 m	8.5 m
Max. basket load	200 kg	200 kg
Rotation	± 355°	± 355°
Basket size	1.25x0.8x1.1 m	1.25x0.8x1.1 m
Power supply	230V/10A**	12V/180Ah/5h
Charger		20 A
Travelling length*	7.10 m	7.10 m
Travelling height*	1.97 m	1.97 m
Travelling width	1.60 m	1.60 m
Operational width	4.10 m	4.10 m
Total weight*	1500 kg	1550 kg
Hydraulic stabilizers	+	+
230 V outlet in basket	+	+
2-step controls	+	+
Hydraulic propulsion	0	0
Turnable basket	0	0

\* Only for standard platform

\*\* Can be delivered with 230 V/16 A

+ Standard

0 Option

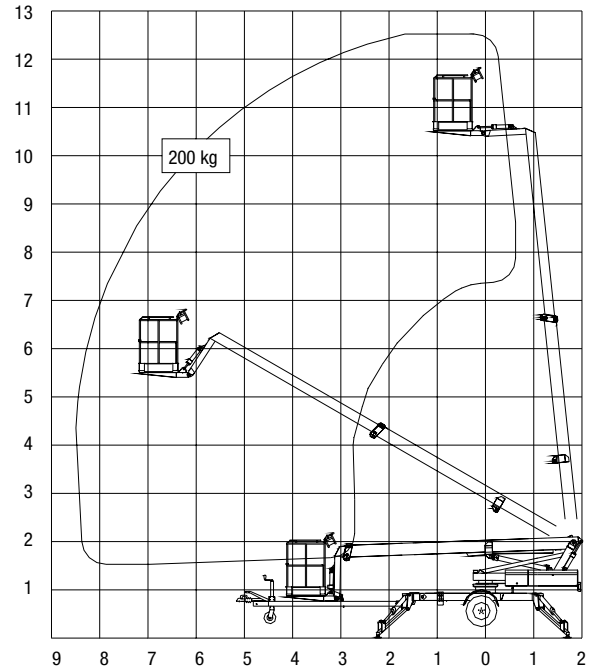

## »Increased outreach«



### 1250 EZ and 1250 EBZ

are identical apart from their power sources. Standard features include hydraulic stabilizers and 2-step dual controls to ground and basket. Design features include a basket mounting that forms a "fly" boom mounted to the top boom section and gives increased outreach over roof edges or other obstacles. The specially designed steel booms made from high and broad profiles allow a great outreach with an exceptional degree of stability and rigidity. The wiring and the telescopic cylinder are protected inside the boom system.

**1250 EZ** is mains powered 230 V and is especially suited, where continuous or extended operation is required.

**1250 EBZ** is powered by a heavy duty (12V/180Ah/5h) battery pack with built-in charger capable of charging the batteries whilst the platform is in use. Type 1250 EBZ is especially suited for jobs, without mains access.

### Hydraulic propulsion option

Omme lift type 1250 EZ and 1250 EBZ can be equipped with a hydraulic propulsion unit. The propulsion is driven by the hydraulic system of the platform and controlled through delicate hydraulic valves. When equipped with this option the platform can propel itself around the work site.