


# Specifications

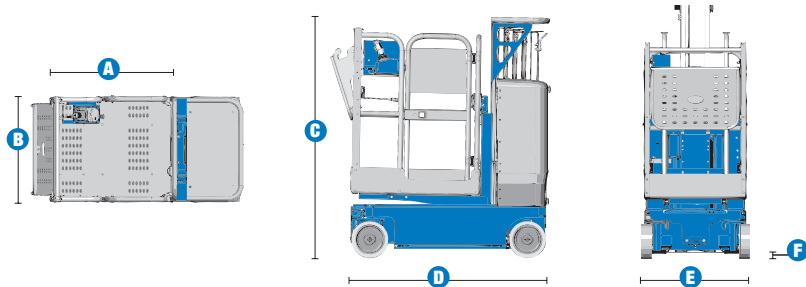

MODELS	QST™-12		QST™-15		QST™-20	
MEASUREMENTS	US	Metric	US	Metric	US	Metric
Working height*	17 ft 5 in	5.48 m	20 ft 8 in	6.47 m	25 ft 11 in	8.07 m
Platform height	11 ft 5 in	3.48 m	14 ft 8 in	4.47 m	19 ft 11 in	6.07 m
<b>A B</b> Platform dimensions (length x width)						
With tray down	35 x 28.75 in	.89 x .73 m	35 x 28.75 in	.89 x .73 m	35 x 28.75 in	.89 x .73 m
With tray up	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m
<b>C</b> Height - stowed	5 ft 2 in	1.57 m	5 ft 2 in	1.57 m	6 ft 6 in	1.98 m
<b>D</b> Length - stowed	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m
<b>E</b> Width	2 ft 5.5 in	.75 m	2 ft 5.5 in	.75 m	2 ft 7.5 in	.80 m
<b>F</b> Ground clearance - center	2.5 in	.06 m	2.5 in	.06 m	2.5 in	.06 m

PRODUCTIVITY						
Lift capacity	500 lbs	227 kg	500 lbs	227 kg	350 lbs	159 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		30%		30%	
Turning radius - inside	zero		zero		zero	
- outside	4 ft 7 in	1.42 m	4 ft 7 in	1.42 m	4 ft 7 in	1.42 m
Raise / lower speed	20 / 18 sec	20 / 18 sec	21 / 19 sec	21 / 19 sec	24 / 21 sec	24 / 21 sec
Controls	24V DC proportional		24V DC proportional		24V DC proportional	
Tires - solid non-marking	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm

POWER						
Power source	24V (four 6V 200 Ah maintenance-free batteries)					
Hydraulic system capacity	2.2 gal		8.33 L			

WEIGHT***						
Retail (R) configuration	1,609 lbs	730 kg	2,220 lbs	1,007 kg	2,479 lbs	1,124 kg
Warehouse (W) configuration	1,581 lbs	717 kg	2,192 lbs	994 kg	2,451 lbs	1,112 kg

**STANDARDS COMPLIANCE**      ANSI A92.6, CSA B354.2, EN 280



\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.  
 \*\*\* Weight will vary depending on options and/or country standards.

## Features

### EASILY CONFIGURED TO MEET YOUR NEEDS

#### PLATFORM

- Stockpicker platform with dual side entry gates and front folding tray

#### POWER

- 24V (four 6V 200 Ah maintenance-free batteries)

#### TIRE

- Non-marking solid tires

#### PRODUCTIVITY (Retail configuration only)

- Dual flashing beacons
- Obstruction sensing pad

### STANDARD FEATURES

#### MEASUREMENTS

##### QS™-12R & QS™-12W

- 17 ft 5 in (5.48 m) working height
- 11 ft 5 in (3.48 m) platform height
- Up to 500 lb (227 kg) lift capacity

##### QS™-15R & QS™-15W

- 20 ft 8 in (6.47 m) working height
- 14 ft 8 in (4.47 m) platform height
- Up to 500 lb (227 kg) lift capacity

##### QS™-20R & QS™-20W

- 25 ft 11 in (8.07 m) working height
- 19 ft 11 in (6.07 m) platform height
- Up to 350 lb (159 kg) lift capacity

### STANDARD FEATURES

#### PRODUCTIVITY

- Stockpicker platform with dual side entry gates and front folding tray
- Stockpicker rear parcel tray (QS™-12 & QS™-15)
- Auxiliary platform lowering
- Low 15.5 in (0.39 m) platform entry height
- Patented rigid mast system
- Enclosed platform cables
- Compact base 29.5 x 53 in (0.75 x 1.35 m) (QS™-12 & QS™-15 only)
- Fully proportional lift and drive controls
- Battery charge indicator
- Onboard diagnostic system
- AC power to platform
- Descent and tilt alarm
- Zero inside turning radius
- Dual wheel brakes
- Hydraulic brake release
- Pothole protection
- Hinged rear ABS covers for easy access to all major electrical and hydraulic components
- Tie down attachment points
- Overhead crane attachment point
- Large forklift pockets access
- Flashing beacons (Retail configuration only)
- Obstruction sensing pad (Retail configuration only)

#### POWER

- Automatic 25 amp battery charger
- Maintenance-free batteries
- 6 ft (1.8 m) charger cord



### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Dual bike hooks
- Motion alarm

**Head Office**  
Westside, London Road,  
Hickstead, West Sussex,  
RH17 5LZ

T 01444 88 11 88  
F 01444 88 11 99  
E hiredesk@facelift.co.uk  
W facelift.co.uk

**facelift**  
access and safety made easy