

nifty

TM34T

TRAILER MOUNTED WORK PLATFORM



40ft (12.20m)

Working height

20ft 1in (6.10m)

Working outreach

Telescopic Upper Boom

Greater accuracy when
positioning platform

Bi-Energy Available

Optimizing utilization

Hydraulic Outriggers

For quick & easy setup

**Fully Proportional
Hydraulic Controls**

Simple, reliable &
easy to maintain

Telescopic Axles

Access through double
doorway openings



nifty



nifty™ TM34T

Designed specifically to give maximum performance from the most compact chassis possible, the Nifty TM34T utilizes its versatile telescopic boom to deliver unrivaled working outreach. Hydraulically operated outriggers make setting up quick and easy and the telescopic axles coupled with its compact base make this one of the most maneuverable trailer mounts available.

SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points



The telescopic boom provides outstanding working outreach especially at lower levels where it's needed most.


The TM34T is also available on low pressure, rough terrain tracks (TD34T)



SPECIFICATIONS

Working Height	40ft	12.20m
Platform Height	33ft 6in	10.20m
Working Outreach	20ft 1in	6.10m
Slew	360°	
Width - Traveling	4ft 11in	1.50m
- Working	11ft 8in	3.55m
- Axles Retracted	3ft 6in	1.10m
Height - Overall	6ft 3in	1.90m
Length - Overall	14ft 9in	4.50m
Weight	3,080lbs*	1,400kg*
Platform Capacity	500lbs	226kg
Platform Size	3ft 8in x 2ft 1in	1.10m x 0.65m
Control System	Fully Proportional Hydraulic	
Power System	Mains Only Battery Only Gas or Diesel Only Bi-Energy (engine & battery)	
Drive Options	Traction Drive	

* Weights may vary according to specification / power options, please confirm before ordering.

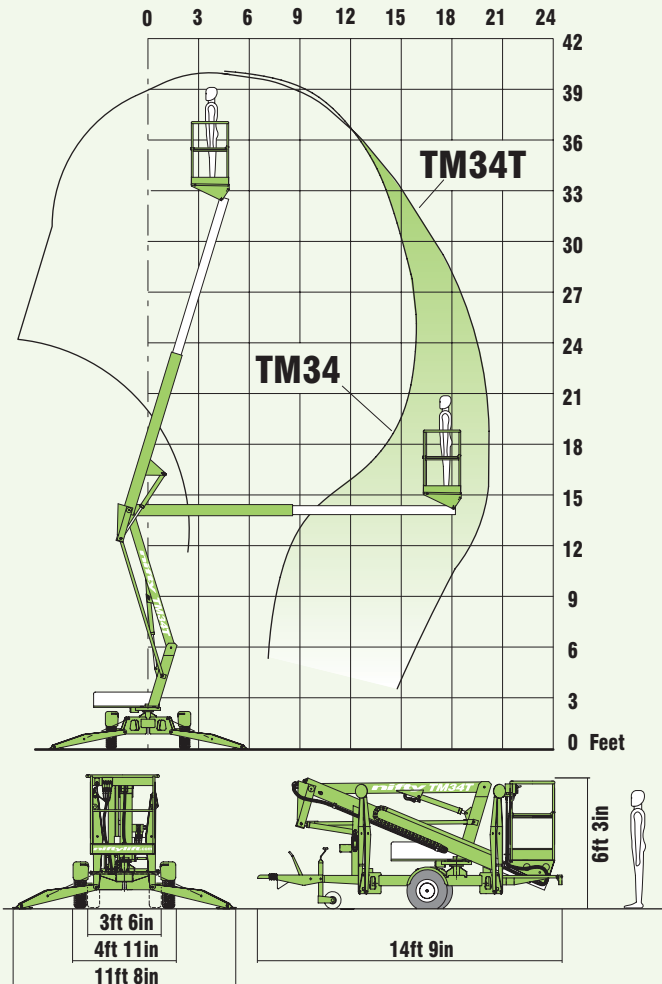

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.