

nifty

V105 V125

VEHICLE MOUNTED ACCESS PLATFORM

Octagonal Boom Sections

Giving increased operator
stability

Final Flick Boom

Greater accuracy when
positioning the platform

Fibreglass Platform

1000v insulation for operators

Safety Interlocks

Prevent vehicle being driven
when P.T.O. is engaged

Fully Proportional Hydraulic Controls

Designed for maximum
operator efficiency

Available on Variety of Vehicles



niftylift.com




nifty

V105 & V125

The Nifty V105 and V125 utilise the latest design technology in order to deliver maximum performance while ensuring operator safety and confidence at all times. Octagonal booms provide a stable yet low weight platform from which to operate, whilst easy to use controls make positioning effortless. Interlocks ensure that the machines can only be operated when correctly set up and stop the operator from driving away while the P.T.O. is still engaged.

Safety Features

- ▶ Pressure sensitive outriggers with audible & visual alarms
- ▶ Dual controls (platform & base)
- ▶ Emergency descent system with hand-pump
- ▶ Lock valves on all hydraulic cylinders
- ▶ Double acting cylinders
- ▶ P.T.O. handbrake interlock
- ▶ CE Mark

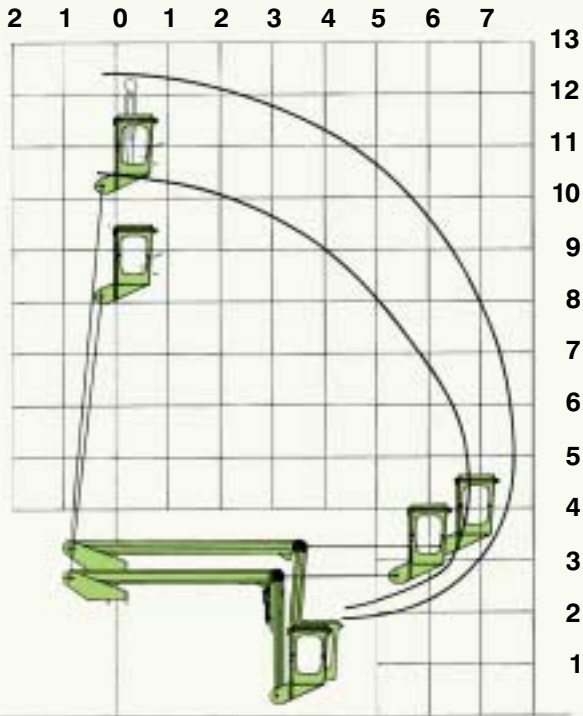

7.20m

Metres



With plenty of space in the back and a generous usable payload, the V105 & V125 can store all the tools and materials needed for a range of different tasks.

Specifications

	V105		V125	
Working Height	10.50m	34ft 5in	12.50m	41ft
S.W.L.	200kg	440lbs	200kg	440lbs
Working Outreach	6.30m	20ft 8in	7.50m	24ft 7in
Weight	Noml 3000kg	2 ton 19 cwt	3900kg	3 ton 18 cwt
	GVW 3500kg	3 ton 9 cwt	4600kg	4 ton 12 cwt
Usable Payload	500kg	10 cwt	700kg	14 cwt
Width	Transit 2.04m	6ft 8in	2.04m	6ft 8in
	Jacked 2.40m	7ft 10in	2.40m	7ft 10in
Height Closed	2.80m	9ft 2in	3.40m	11ft 2in
Length Closed	6.40m	21ft	6.60m	21ft 8in
Platform Size	1.20m x 0.77m x 1.15m		3ft 11in x 2ft 7in x 3ft 9in	
Control Systems	Fully proportional hydraulic controls			
Power	Gearbox mounted, manually engaged power-take-off system, directly driving full flow pump			
Emergency Operation	12V D.C. power pack for emergency descent. Emergency handpump fitted as standard.			
Vehicle Controls	Engine stop/start from platform			
Interlocks	Full platform/stabiliser jack reverse interlocking Vehicle P.T.O./handbrake interlock with engine stop facility			

Due to a policy of continuing development and improvement Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.