

Model

740AJ

**ARTICULATING
BOOM LIFT**

facelift
access and safety made easy

DL

Features

Fall arrest platform and boom
90 mph (144 kph) jet blast rating
6 ft. (1.37 m) articulating jib
36 x 72 in (.91 x 1.83 m) low mount platform
4WD/4WS
Fixed Axle
2500W generator
Operator's tool tray and corner tool tray
18 x 19.5 in. foam filled wide lug tread tires
180 degree hydraulic platform rotator
Platform console machine status light panel*
110V-AC receptacle in the platform
5 degree tilt alarm/indicator light
Swing-out engine module
Gull-wing engine hood
12V-DC auxiliary power
Hourmeter
Hydrostatic drive
Proportional controls
Lifting/tie down lugs
Horn

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light and foot switch status.

Accessories & Options

Light Package¹
Soft Touch System
1/2 in. Air Line to Platform
On Board Air Compressor
Welding Lead to Platform
Alarm Package²
43.5 Propane Tank
Cold Weather Start Kit (Ford)³
Cold Weather Start Kit (Deutz)³
Hostile Environment Kit⁴

1. Includes platform work lights, head and tail lights.

2. Includes all motion alarm and flashing amber beacon.

3. Includes engine block heater (Ford) or ether assist (Deutz), battery heater, oil tank heater.

4. Includes console cover, boom wipers and cylinder bellows.



Raising the Standards in Aircraft Maintenance and Safety




- Articulating jib allows for more precise positioning and access to all external surfaces on any aircraft.
- The Fall Arrest platform allows workers exit the platform and move a full 270 degrees around the platform within a radius of six feet, while still being afforded fall protection.
- Meets industry jet blast standards (ARP 1328) of 80-mph steady winds and 90-mph gusts, allowing the machine to be used in both controlled and uncontrolled areas.
- The Soft Touch System reduces the risk of accidental contact and damage during aircraft maintenance. This optional package features a suspended padded rail that surrounds the platform basket. Proximity sensors de-activate platform movement functions and alert the operator if the basket comes too close to the aircraft surface.

Model 740AJ

ARTICULATING BOOM LIFT

Specifications

740AJ

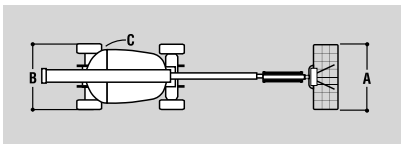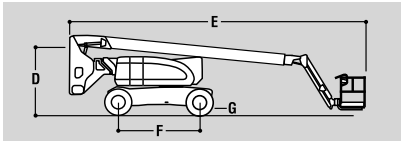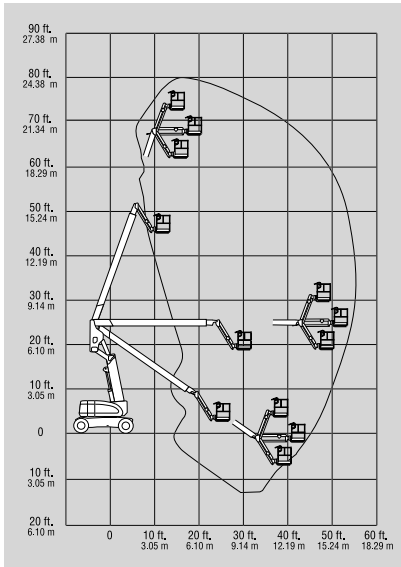

Reach

Platform Height	74 ft (22.60 m)
Horizontal Reach	51 ft 10 in. (15.80 m)
Up and Over Height	25 ft 1 in. (9.78 m)
Swing	360 Degrees Continuous
Platform Capacity-Unrestricted	500 lb (227 kg)
Platform Rotator	180 Degrees Hydraulic
Jib Length	6 ft (1.83 m)
Jib Range of Articulation	130 Degrees (+70, -60)

Dimensions

A. Platform Size	36 x 72 in. (0.91 x 1.83 m)
B. Overall Width	8 ft (2.44 m)
C. Tailswing	2 ft 6 in. (76 cm)
D. Stowed Height	9 ft 10 in. (3.0 m)
E. Stowed Length	36 ft 6 in. (11.13 m)
F. Wheel Base	10 ft (3.05 m)
G. Ground Clearance	12 in. (30 cm)
Weight*	36,200 lb (16,420 kg)
Max. Ground Bearing Pressure	84 psi (5.3 kg/cm ²)

Chassis

Drive Speed 4WD	3.0 mph (4.8 kmph)
Gradeability 4WD	45%
Turning Radius, (Inside/Outside)	7 ft/14 ft 6 in. (2.13 m/4.42 m)
Tires/Type	445/55D19.5 Foam-Filled Wide Lug Tread

Power Source


Dual Fuel Engine,	GM Vortec 3000 MPFI 82 hp (61 kW)
Diesel Engine,	Deutz D2011L04 65 hp (48 kW)
Fuel Tank Capacity	40 gal. (151.4 L)
Hydraulic Reservoir	48 gal. (181.7 L)
Auxiliary Power	12V DC

* Certain options or country standards will increase vehicle weight.

Fall Arrest Platform



Worker Envelope

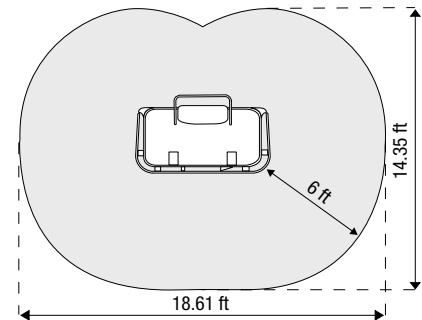

Platform Area: 18 sq ft
Total Work Area: 210 sq ft

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. These machines meet or exceed applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, ANSI A92.5-2006 and CSA standard CSA-B354.4-02 as originally manufactured for intended applications. We reserve the right to make price, specification, and/or equipment changes without prior notification.

Head Office
Westside, London Road,
Hickstead, West Sussex,
RH17 5LZ

T 01444 88 11 88
F 01444 88 11 99
E hiredesk@facelift.co.uk
W facelift.co.uk

facelift
access and safety made easy