

**UpRight**  
**X20**

# Scissor lifts

standard electric

**Working height up to:  
8.10m (26ft.)**

**Rigid scissor-set provides  
solid, stable platform**

**Highly manoeuvrable -  
very tight turning radius**

**Low stowed height and  
lifting rear guardrail for  
easy loading**

**Swing out component  
modules**

**Fully proportional,  
one-hand controls**

**Steel deck with  
slip-resistant surface**

**Non-marking tyres**

**Five year  
structural warranty**



specifications	X20N	X20W
working height (A)	8.10m (26ft.)*	8.10m (26ft.)*
platform height (B)	6.10m. (20ft.)	6.10m. (20ft.)
drive height (max)	6.10m. (20ft.)	6.10m. (20ft.)
platform capacity (max)	340kg. (750lbs.)	454kg. (1,000lbs.)
platform size - inside	0.71m. x 3.2m.	1.17m. x 3.2m.
with deck extended	(28ins. x 126ins.)	(46.25ins. 126ins.)
width (C)	0.82m. (32.5ins.)	1.22m. (48ins.)
length (D)	2.35m. (92.5ins.)	2.35m. (92.5ins.)
stowed height (E)	1.99m. (78.5ins.)	1.99m. (78.5ins.)
weight	1,736kg. (3,828lbs.)	1,938kg. (4,273lbs.)
drive speed (max)	3.2km/h. (2.0mph)	3.2km/h. (2.0mph.)
-with platform raised	1.0km/h. (0.62mph.)	1.0km/h. (0.62mph.)
gradeability	13° (23%)	13° (23%)
inside turning radius	203mm. (8ins.)	203mm. (8ins.)
ground clearance	114mm. (4.5ins.)	114mm. (4.5ins.)
lift speed - raised / lowered	30 secs / 30 secs	40 secs / 30 secs
drive system	dual front wheel hydraulic motors	
power source	4 x 6V 220 Ah batteries	
control system	one-hand proportional control	
tyres	381mm (15ins.) dia. solid non-marking	
toeboards	152mm. (6ins.)	152mm. (6ins.)
battery charger	25 A, 110/220V AC	25 A, 110/220V AC
parking brake	dual, spring-applied, hydraulic release	

\*Metric working height is 2m above platform height. Working height in the U.S. is 6 ft. above platform height.


Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance of this equipment.

## standard features

- Roll-out deck extension
- One-hand proportional control
- Lift-up rear handrail to ease loading
- Tilt alarm, descent alarm
- Non-marking tyres
- Swing-out service modules
- Crane and forklift points
- Power to platform
- Proportional controls
- Selectable motion alarm
- 1 year parts/service
- 5 year structural warranty

## options


- Horn
- Air line to platform
- Flashing beacon
- Removable controller
- Hour meter/low voltage indicator
- Special paint colours
- Environmental green oil

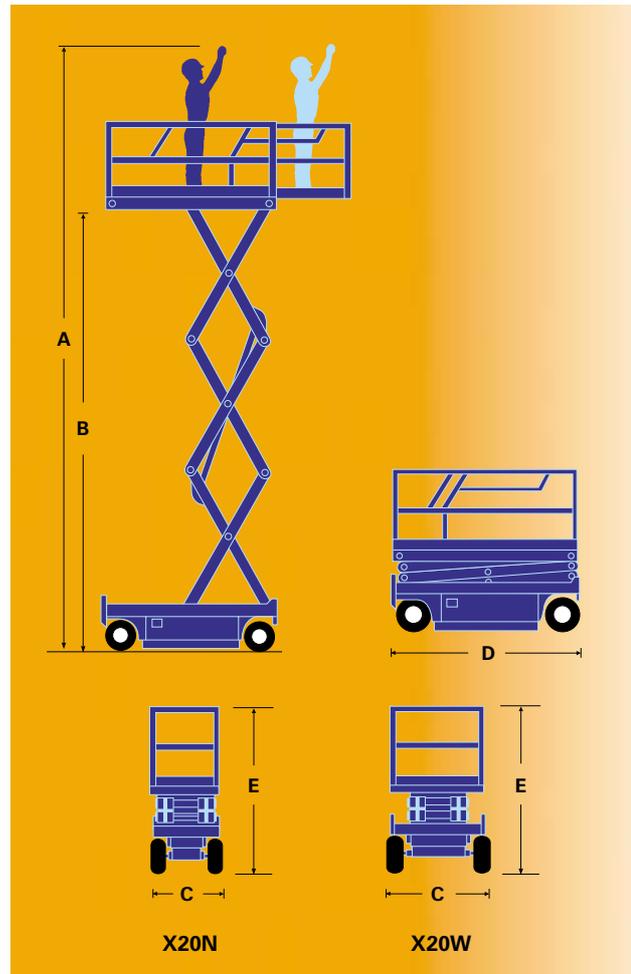

Non-marking tyres are fitted as standard to protect floor finishes.



Easily-accessible rear-mounted battery charger allows operation during charging. Swing out modules allow access to all service components in seconds, encouraging regular maintenance.



Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by

**UpRight**