

RUTHMANN HIGHquality

For those who want to reach great heights.

You as a rental company of hydraulic aerial platforms receive more and more enquiries from customers, who need a machine with above-average performance data in working height and lateral outreach?

The **RUTHMANNSTEIGER® TU 610** is a heavy-duty machine, which can bring you into the 1st league of hydraulic aerial platforms. This machine offers you a working height of up to 60,30 metres and a lateral outreach to either side of up to 34,00 metres. With this machine you and/or your customer can work at façades and even complete tower block walls without having to move the vehicle.

The telescopic Rüssel® (cage lifting arm) which can be extended by 3,50 metres provides you an extraordinary moveability. With its swivelling angle you can use the articulated top boom extremely flexible and also come over obstacles like e.g. projections of a wall without any difficulties.



RUTHMANNSTEIGER® TU 610

The working cage which can be extended to a size of up to 3,70 metres offers your staff as well as heavy tools sufficient space and safety, because it has an extreme high carrying capacity of 360 kgs.

Four horizontal-vertical stabilizing jacks warrant you the necessary stability. You can also use this machine in narrow streets or on access roads, because the stabilizing jacks can also be extended unilaterally and within the vehicle profile. With the control at the vehicle you can extend and retract the jacks separately as well as in pairs.

Two processor systems independent from each other, which supervise mutually, provide you as redundant control system most

possible safety. You get an extra first-class additional function with the electronic cushioning of final positions for lifting boom, articulated top boom and telescope.

The Highlight: For offroad use we mount the **RUTHMANNSTEIGER® TU 610** for you even on a 8 x 6 x 4 allwheel-drive carrier-chassis.


Contact us – by phone, fax or E-mail. We would be pleased to give you detailed information concerning the performance spectrum of our proven STEIGER® and demonstrate profit and advantages arising for you.

RUTHMANNSTEIGER® TU 610

Working height:	60,30 m
Lifting height:	58,30 m
Lateral outreach:	34,00 m*
Range of rotation:	450°
Swivelling angle of articulated top boom Rüssel®:	180°
Size of working cage:	2,30 x 0,90 m
to be extended up to:	3,70 x 0,90 m
Carrying capacity of working cage:	360/200 kg
Telescopic extension:	28,40 m
plus telescopic extension of Rüssel®:	3,50 m
Permissible siting inaccuracy:	0°
Total height:	4,00 m
Perm. total weight:	from 32.000 kg

* Depending on load and execution

Load of working cage up to 360 kg

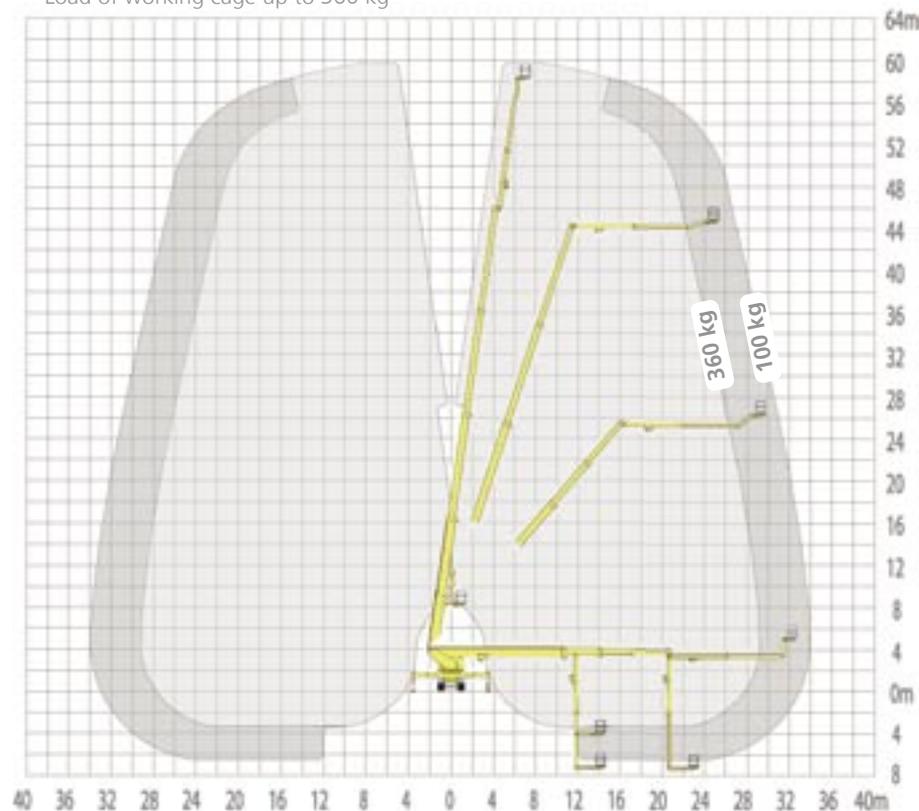

All dimensions in meters. All measurements and weights are approximate and refer to the standard basic execution. Technical alterations reserved. Steiger®, Gelenksteiger®, and Rüssel® are registered trademarks of Anton Ruthmann GmbH & Co. KG